




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04N 5/335</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/55082</b> (43) International Publication Date: 28 October 1999 (28.10.99)
(21) International Application Number: PCT/US99/03262 (22) International Filing Date: 17 February 1999 (17.02.99) (30) Priority Data: 09/062,343 17 April 1998 (17.04.98) US (71) Applicant: CONEXANT SYSTEMS, INC. [US/US]; 4311 Jamboree Road, D/876, M/S E09-900, Newport Beach, CA 92660-3095 (US). (72) Inventors: GUNAWAN, Ferry; Apartment G, 3810 South Flower Street, Santa Ana, CA 92707 (US). TROTTA, Dino, D.; Unit A2, 308 Santa Isabel, Costa Mesa, CA 92627 (US). (74) Agent: GESS, Albin, H.; Price, Gess & Ubell, Suite 250, 2100 S.E. Main Street, Irvine, CA 92614-6238 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published With international search report.

(54) Title: LOW COST LINE-BASED VIDEO COMPRESSION OF DIGITAL VIDEO STREAM DATA

## (57) Abstract

CMOS imaging apparatus including first and second chips, the first chip having formed thereon a CMOS image sensor, an analog to digital converter circuit, and a CMOS driver circuit providing first and second differential outputs. The second chip includes a CMOS digital signal processor and a plurality of CMOS receiver circuits, each having a pair of differential inputs adapted to be connected to the plurality of differential outputs of the first chip to form a series of low voltage differential signaling circuits. Implementation of the invention facilitates implementation of CMOS image sensors containing at least one million light responsive pixel image sensors wherein data is transferred between the CMOS image sensor and the CMOS image processor at data rates of 30 MHz or more.

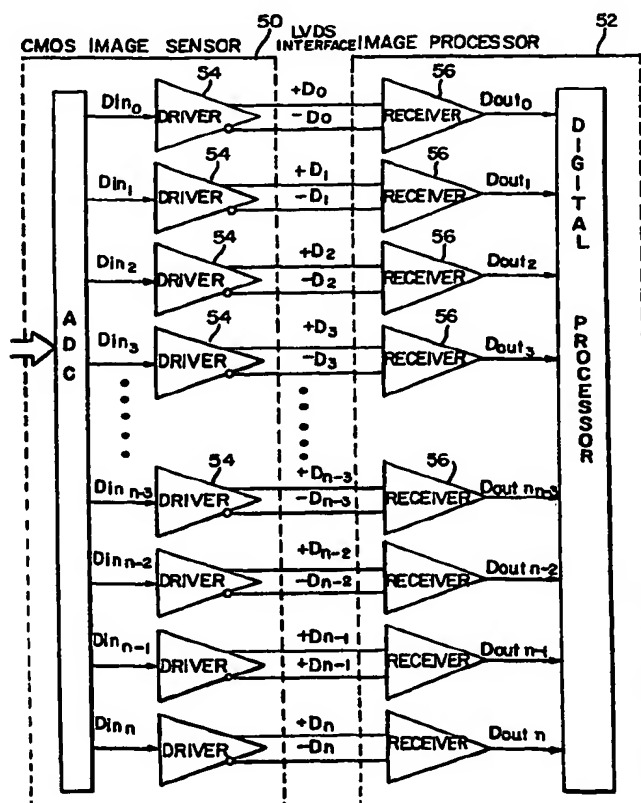

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## LOW COST LINE-BASED VIDEO COMPRESSION OF DIGITAL VIDEO STREAM DATA

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The present invention relates generally to image processing and more specifically pertains to a video compression algorithm for increasing the data throughput  
5 on a limited bandwidth link between a host and a digital video camera.

#### 2. Description of Related Art

A digital image represents a two-dimensional array of samples, where each sample is called a pixel. Precision determines how many levels of intensity can be represented and is expressed as the number of bits/sample. Resolution of an image refers  
10 to its capability to reproduce fine details. Higher resolution requires more complex imaging systems to represent these images in real-time. In video systems, resolution refers to the number of line pairs resolved on the face of the display screen, expressed in cycles per picture height, or cycles per picture width. Full motion video is characterized with at least a 24-Hz frames/sec, and 30 or even 60 frames/sec for high definition TV.  
15 For animation, acceptable frame rate is in the range 15-19 frames/sec while for video telephony it is 5-10 frames/sec. Videoconferencing and interactive multimedia applications require the rate of 15-30 frames/sec.

Commercial imaging applications are surfacing in digital broadcast television, compact disk video, multimedia, video teleconferencing systems, dynamic medical  
20 imaging devices, and high definition TV. Imaging applications are time critical and computationally and data intensive, and require both the storage and transmission of enormous data sets which can be accomplished with image compression. Achieving the compression ratios necessary for digital video involves the processing of individual images to remove spatial redundancies and a motion analysis of the sequence to remove  
25 temporal redundancies.

-2-

square of the charging voltage, i.e., the voltage level of the ADC's digital output signal. The conventional single ended signaling method uses charging voltages between 2.7 and 5 volts, which entails increasingly undesirable power consumption as frequencies increase. Thus, creation of higher resolution CMOS video images has faced significant  
5 obstacles.

### OBJECTS AND SUMMARY OF THE INVENTION

It is therefore an object of the invention to improve CMOS imaging systems;

It is another object of the invention to reduce power consumption of such  
10 systems;

It is another object of the invention to provide improved apparatus for transmitting the output of a CMOS image sensor to a digital signal processor;

It is still another object of the invention to provide for faster, more efficient pixel data transmission in CMOS imaging apparatus;

It is yet another object of the invention to facilitate production of CMOS  
15 imaging apparatus of greatly improved resolution.

These and other objects and advantages are achieved according to the invention by provision of CMOS imaging apparatus comprising a CMOS image sensor, a CMOS image processor, and a plurality of low voltage differential signaling circuits  
20 connected between the image sensor and the image processor. Each low voltage differential circuit comprises a CMOS driver circuit, a CMOS receiver circuit, and a pair of transmission lines interconnecting the driver circuit and receiver circuit. Each low voltage differential signaling circuit transfers a portion of the output of the image sensor

-3-

array to a receiver communicating with the digital signal processor. In this manner, extremely low power and low noise high speed operation is achieved.

According to one illustrative embodiment, the CMOS imaging apparatus comprises first and second silicon substrate chips. The first chip has formed thereon a CMOS image sensor including an analog to digital converter circuit, which provides a plurality of digital pixel signal value output signals. The first chip further includes a plurality of CMOS driver circuits, each receiving as an input a selected one of the plurality of digital pixel signal value output signals and having first and second differential outputs. The second chip includes a CMOS digital signal processor formed thereon which has a plurality of inputs connected to respective outputs of a plurality of CMOS receiver circuits. Each CMOS receiver circuit has a pair of differential inputs adapted to be connected to the differential outputs of the first chip. The apparatus further includes a pair of transmission lines connected between each respective pair of differential outputs and differential inputs.

Implementation of the invention permits use of a CMOS image sensor containing at least one million light responsive CMOS pixel image sensors wherein data is transferred between the CMOS image sensor and the CMOS image processor at a data rate of 30 MHz or more.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The objects and features of the present invention, which are believed to be novel, are set forth with particularity in the appended claims. The present invention, both as to its organization and manner of operation, together with further objects and

advantages, may best be understood by reference to the following description, taken in connection with the accompanying drawings, of which:

Figure 1 is a circuit schematic of a low voltage differential signaling circuit; and

5                   Figure 2 is a circuit diagram of the preferred embodiment of the invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The following description is provided to enable any person skilled in the art to make and use the invention and sets forth the best modes contemplated by the  
10                   inventors of carrying out their invention. Various modifications, however, will remain readily apparent to those skilled in the art, since the general principles of the present invention have been defined herein specifically to provide high speed, highly efficient CMOS imaging apparatus capable of increased resolution.

15                   Figure 1 illustrates a conventional low voltage differential signaling (LVDS) circuit 11. The LVDS 11 circuit includes a current source  $I_1$  (nominal 3.5mA) which drives one of the differential pair lines 13, 15. The receiver 17 has a high DC impedance (it does not source or sink DC current), so the majority of driver current flows across the 100  $\Omega$  termination resistor  $R_1$  generating about 350mV across the  
20                   receiver inputs 19, 21. When the driver 23 switches, it changes the direction of current flow across the resistor  $R_1$ , thereby creating a valid "one" or "zero" logic state.

-5-

comparison, an RS 422 driver typically delivers 3 volts across a 100  $\Omega$  termination, for 90 mW power consumption -- 75 times more than LVDS. Similarly, LVDS devices 11 require roughly one-tenth the power supply current of PECL/ECL devices.

Aside from the power dissipated in the load and static  $I_{CC}$  current, LVDS  
5 also lowers system power requirements through its CMOS current-mode driver design. This design greatly reduces the frequency component of  $I_{CC}$ . The  $I_{CC}$  vs. frequency plot for LVDS 11 is virtually flat between 10 MHz and 100 MHz for the quad devices (<50 mA total for driver + receiver at 100 MHz). In contrast, single ended, TTL/CMOS transceivers exhibit dynamic power consumption which increases exponentially with  
10 frequency.

To help ensure reliability, LVDS receivers 17 have a fail-safe feature that guarantees the output to be in a known logic state (HIGH) under certain fault conditions. These conditions include open, shorted, or terminated receiver inputs. If the driver 23 loses power, is disabled or is removed from the line, while the receiver 17 stays powered  
15 on with inputs terminated, the receiver output remains in a known state with the fail-safe feature.

If LVDS receivers 17 did not have the fail-safe feature and one of the fault conditions occurred, any external noise above the receiver thresholds could trigger the output and cause an error. A receiver without fail-safe could even go into oscillation  
20 under certain fault conditions. The fail-safe features ensures that the receiver output will be a HIGH -- rather than an unknown state -- under fault conditions.

Figure 2 illustrates CMOS video imaging sensing circuitry according to the preferred embodiment. This circuitry includes a CMOS image sensor chip 50 and an

Figure 2 illustrates CMOS video imaging sensing circuitry according to the preferred embodiment. This circuitry includes a CMOS image sensor chip 50 and an image processor chip 52. The CMOS image sensor chip 50 typically includes a number of light responsive CMOS pixel sensors which develop analog signals representative of an image. These analog signals are then A to D converted by the ADC circuit to form digital signals  $Din_0, Din_1 \dots Din_n$ . The image processor chip 52 includes a data processor 53 which performs various manipulations of the image data such as compression and color processing. The processor 53 may be software driven or a hardware embodiment.

As may be seen, the circuit of Figure 2 employs a plurality of LVDS circuits 11. Each circuit 11 includes a respective driver 54 and a respective receiver 56. Each driver 54 receives a respective input signal  $Din_0, Din_1 \dots Din_n$ , which are digital logic levels of, for example, 3.3 volts for logic "1" and zero volts for logic "0". Changes in state in these signals are transmitted over the differential lines to the respective receivers 56. Each receiver 56 generates a respective output signal  $Dout_0, Dout_1, \dots Dout_n$ , which are at the several hundred milli-volt level.

In the preferred embodiment, the image sensor is a 1 Mega Pixel Sensor, and the pixel data is transferred at a rate of 30 MHz across the interface to the image processor 52, via 10 LVDS circuits 11. The circuitry of Figure 2 is preferably fabricated using CMOS fabrication technology, wherein the drivers 54 are formed as part of a silicon substrate-based CMOS image sensor chip 50 and the receivers 56 are formed as part of a silicon substrate-based signal processor chip 52. The leads or transmission lines 58, 60 then comprise metallic conductor paths laid out on a printed circuit board



-7-

between the two chips 50, 52. Various other embodiments could include an image sensor larger or smaller than 1 Mega Pixel, could operate at more or less than 30 MHz and could employ more or less than 10 LVDS circuits 11.

Those skilled in the art will appreciate that various adaptations and  
5 modifications of the just-described preferred embodiment can be configured without departing from the scope and spirit of the invention. Therefore, it is to be understood that, within the scope of the appended claims, the invention may be practiced other than as specifically described herein.

CLAIMSWhat Is Claimed Is:

- 1           1.     The CMOS imaging apparatus comprising:  
2                   a CMOS image sensor;  
3                   a CMOS image processor; and  
4                   a plurality of low voltage differential signaling circuits connected  
5                   between said image sensor and said image processor.
- 1           2.     The apparatus of Claim 1 wherein each of said plurality of low voltage  
2     differential signaling circuits comprises:  
3                   a CMOS driver circuit;  
4                   a CMOS receiver circuit; and  
5                   a pair of transmission lines interconnecting said driver circuit and said  
6                   receiver circuit.
- 1           3.     The apparatus of Claim 2 wherein said CMOS image sensor contains at  
2     least one million light responsive pixel image sensors.
- 1           4.     The apparatus of Claim 3 wherein said plurality of low voltage  
2     differential signaling circuits comprise means for transferring data between said CMOS  
3     image sensor and said CMOS image processor at a data rate of 30 MHz or more.
- 1           5.     The apparatus of Claim 4 wherein said plurality of low voltage  
2     differential signaling circuits comprises at least 10 low voltage differential signaling  
3     circuits.

1           6.     The apparatus of Claim 5 wherein said CMOS image sensor and said  
2     CMOS driver circuits are formed on a first silicon circuit chip.

1           7.     The apparatus of Claim 6 wherein said CMOS image processor circuit  
2     and said CMOS receiver circuits are formed on a second silicon circuit chip.

1           8.     The apparatus of Claim 7 wherein each said pair of transmission lines  
2     resides on a surface located between said first and second circuit chips.

1           9.     The apparatus of Claim 2 wherein each CMOS driver circuit receives a  
2     digital input signal from an analog to digital conversion circuit.

1           10.    The apparatus of Claim 8 wherein each CMOS driver circuit receives a  
2     digital input signal from an analog to digital conversion circuit.

1           11.    The CMOS imaging apparatus comprising:  
2                   a first silicon substrate chip having formed thereon a CMOS image  
3     sensor including an analog to digital converter circuit providing a plurality of  
4     digital pixel signal value output signals, said chip further including a CMOS  
5     driver circuit receiving as an input a selected one of said plurality of digital pixel  
6     signal value output signals and having first and second differential outputs.

1           12.    The CMOS image apparatus of Claim 11 further including:  
2                   a second silicon substrate circuit chip having a CMOS digital signal  
3     processor formed thereon, said digital signal processor having a plurality of  
4     inputs connected to respective outputs of a plurality of CMOS receiver circuits,  
5     each CMOS receiver circuit having a pair of differential inputs adapted to be  
6     connected to said plurality of differential outputs.

1           13.    The CMOS imaging apparatus of Claim 12 further including a pair of  
2   transmission lines connected between each respective pair of differential outputs and  
3   differential inputs.

1           14.    The apparatus of Claim 12 wherein said CMOS image sensor contains at  
2   least one million light responsive pixel image sensors.

1           15.    The apparatus of Claim 12 wherein said plurality of low voltage  
2   differential signaling circuits comprise means for transferring data between said CMOS  
3   image sensor and said CMOS image processor at a data rate of 30 MHz or more.

1           16.    The apparatus of Claim 12 wherein said plurality of low voltage  
2   differential signaling circuits comprise at least 10 low voltage differential signaling  
3   circuits.

1           17.    A method image processing comprising the step of:  
2                    developing an analog image signal using a plurality of CMOS image  
3                    sensing pixels;  
4                    A-D converting said analog image signal to form a plurality of digital  
5                    pixel value output signals; and  
6                    transferring said digital pixel value signals to a digital image processor  
7                    through a plurality of low voltage differential signaling circuits.

1           18.    The method of Claim 1 wherein a respective one of said low voltage  
2   differential circuits is selected to transfer a corresponding one of said digital signal pixel  
3   value signals.


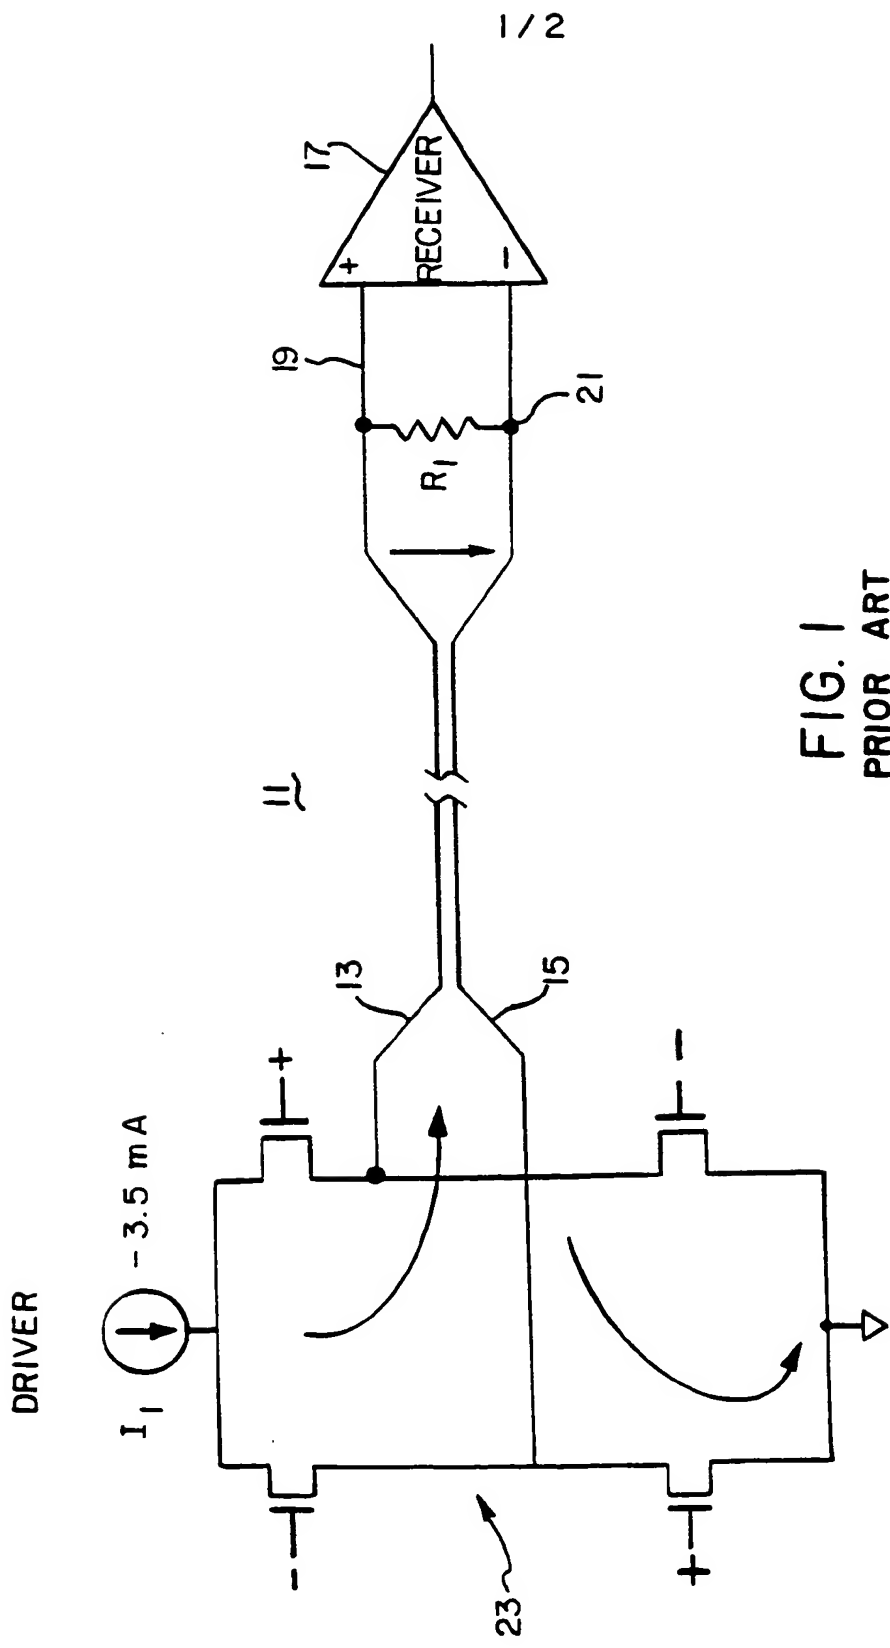


FIG. 1  
PRIOR ART

2 / 2

FIG. 2

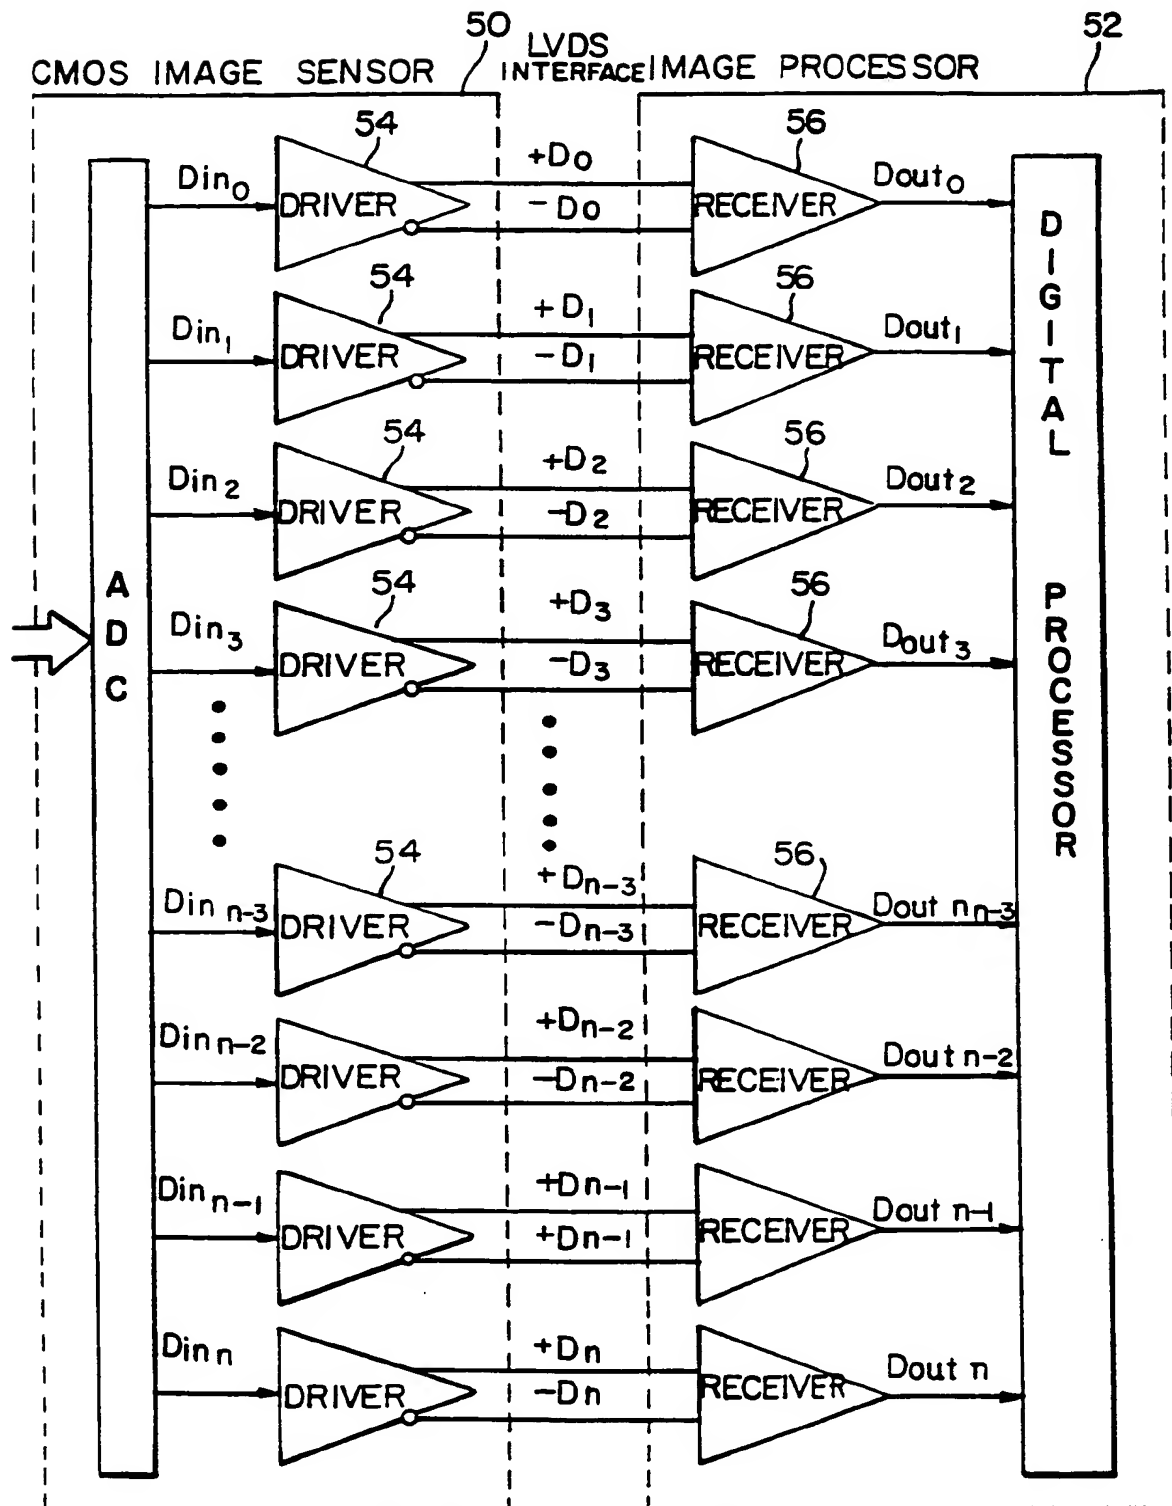

# INTERNATIONAL SEARCH REPORT

Inte. :nal Application No

PCT/US 99/03262

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 H04N5/335

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 485 488 A (VAN BRUNT ROGER W ET AL) 16 January 1996 see column 5, line 37 - line 46 see column 2, line 11 - line 36	1,11,17
A	EP 0 778 516 A (TEXAS INSTRUMENTS INC ;IBM UK (GB)) 11 June 1997 see page 5, line 16 - line 22 see page 4, line 31 - line 36	1,11,17
A	US 5 625 412 A (ACIU ALEXANDRU V ET AL) 29 April 1997 see column 3, line 17 - line 67	1,11,17
A	EP 0 778 517 A (TEXAS INSTRUMENTS INC) 11 June 1997 see column 2, line 45 - column 3, line 12; figure 1	1,11,17

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

8 June 1999

Date of mailing of the international search report

14/06/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2  
NL - 2280 MV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Bequet, T

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/03262

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>UNEWISSE M H ET AL: "A GENERAL CONTROL SYSTEM FOR IMAGING ARRAYS"            MEASUREMENT SCIENCE AND TECHNOLOGY,            vol. 5, no. 4, 1 April 1994, pages            347-352, XP000446308            see page 349, line 48 - line 59            -----</p>	1,11,17



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/03262

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5485488	A	16-01-1996	AU 2104495 A WO 9527353 A	23-10-1995 12-10-1995
EP 0778516	A	11-06-1997	CA 2191504 A CN 1164703 A JP 9311670 A	02-06-1997 12-11-1997 02-12-1997
US 5625412	A	29-04-1997	NONE	
EP 0778517	A	11-06-1997	JP 9246974 A SG 52866 A	19-09-1997 28-09-1998